



neolab Migge GmbH
Rischerstr. 7-9
69123 Heidelberg
Deutschland
+49 (0)6221 /
8442-44
<https://www.neolab.de>
e


Umsatzsteuer-
Identifikationsnummer
:
DE 143 450 657



2mag Mini magnetic stirrer cuvetteMIXdrive, wear-free 1 stirring position, up to 25 ml, ideal for cuvettes, with ext. controller

€303.00
plus VAT &
Shipping

Product Images

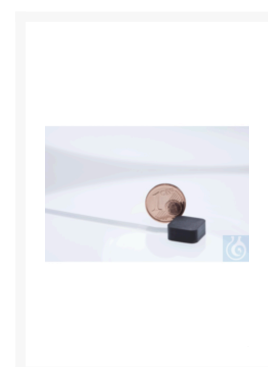

Description

Magnetic stirrer, miniaturized, wear-free 1 stirring position, for up to 25 ml stirring volume, ideal for instrument integration e.g. in photometers. 1 stirring position with 100% wear- and maintenance-free 2mag induction drive for mixing solutions, 100% synchronous rotation, jerk-free stirring even at low speeds. Fully potted and hermetically sealed polyurethane housing, IP68, waterproof, dustproof and germproof, easy to clean and maximum resistant, submersible in water baths. 3 years warranty on all material and manufacturing defects, developed and made in Germany. Please order control unit MIXcontrol separately! Stirring positions: 1 Stirring quantity/stirring position: 25 ml Stirring power (max.) : 10 W Housing material: PUR Sealing material: PUR Perm. operating temperature (air): -10 to +50 °C in air Perm. operating temperature (water): up to +50 °C immersed in water Perm. storage conditions: -40 °C to +70 °C, 10 - 95 %, 500 - 1060 hPa Operating voltage (max.) 24 VDC Protection class: IP68 Dimensions (WxDxH): 12.5 x 12.5 x 6 mm Shipping weight (gross): approx. 0.14 kg

Additional Information

No.	ZU-0025
Manufacturer (Brand)	2mag
EAN	4058072444716
Gross weight	0.14
Storage temperature	Room temperature
Transport temperature	Room temperature
Net weight	0.08000 kg
Country of origin	Germany
Region of origin	Bavaria
Packing width	0.15000 m
Packing height	0.10000 m
Wide	13 mm
Packing depth	0.15000 m
Packaging volume	0.00225000 cc
Customs tariff number	84798200
Height	6 mm
Depth	13 mm
Voltage	230 V
for ambient temperature	-10 to 50 °C
Drive	Magnetic field drive
Number of stirring points	1
Protection class	IP 68
Stirring volume/stirring point MAX	25 ml

