




neolab Migge GmbH
Rischerstr. 7-9
69123 Heidelberg
Deutschland
+49 (0)6221 /
8442-44
<https://www.neolab.de>
e


Umsatzsteuer-
Identifikationsnummer
:
DE 143 450 657



2mag atexMIXcontrol control unit explosion-proof

€5,174.00
plus VAT &
Shipping

Product Images

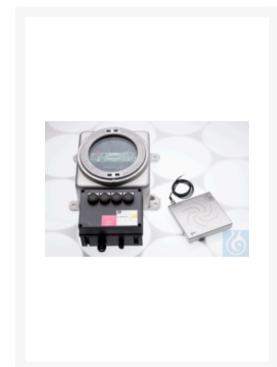

Description

Designed for atexMIXdrive stirrer drives for operation in explosion protection zone 1. Explosion-proof control unit for connection of an atexMIXdrive stirrer drive and operation in explosion protection zone 1. 20 W stirring power, 4-step power setting, speed range from 100 to 2,000 rpm, jerk-free stirring even at low speeds. Digital display for speed and power setting, SoftStart for reliable catching/centering and safe acceleration of the stirring staff, QuickSet for fast setting of the initial or maximum speed, saving of the last functional state when switched off, explosion-proof flameproof housing, temperature range up to +40°C, certified according to ATEX II 2G Ex db eb IIC T6 Gb. 2 years warranty on all material and manufacturing defects, developed and made in Germany. Note: Control unit atexMIXcontrol and stirrer drive atexMIXdrive are firmly connected! Speed range: 100 - 2,000 rpm Stirring power (max.): 20 W Power setting: 4-stage (5/10/15/20 W) Housing material: aluminum/plastic Perm. operating temperature: 0 to +40 °C (at 80% humidity) Perm. storage conditions: -40 °C to +40 °C (at 80% humidity) Storage conditions: -40 °C to +70 °C, 10 - 95 %, 500 - 1060 hPa Connected load: 100-240 V / 50-60 Hz / 1.5 A Output voltage: 48 VDC Protection class: IP65 Dimensions (WxDxH): 360 x 460 x 200 mm Shipping weight (gross): approx. 18 kg Ex-marking: II 2G Ex db eb IIC T6 Gb

Additional Information

No.	ZU-0088
Manufacturer (Brand)	2mag
VGKL number	101859920
EAN	4058072445249
Gross weight	18
Transport temperature	Room temperature
Net weight	17.10000 kg
Country of origin	Germany
Packing width	0.63000 m
Packing height	0.33000 m
Packing depth	0.32000 m
Packaging volume	0.06652800 cc
Customs tariff number	90328900

