



neolab Migge GmbH
Rischerstr. 7-9
69123 Heidelberg
Deutschland
+49 (0)6221 /
8442-44
<https://www.neolab.de>
e


Umsatzsteuer-
Identifikationsnummer
:
DE 143 450 657



neolab® Mini Diaphragm Pump, 1.27 L/min, 330 mbar

€158.00
plus VAT &
Shipping

Product Images

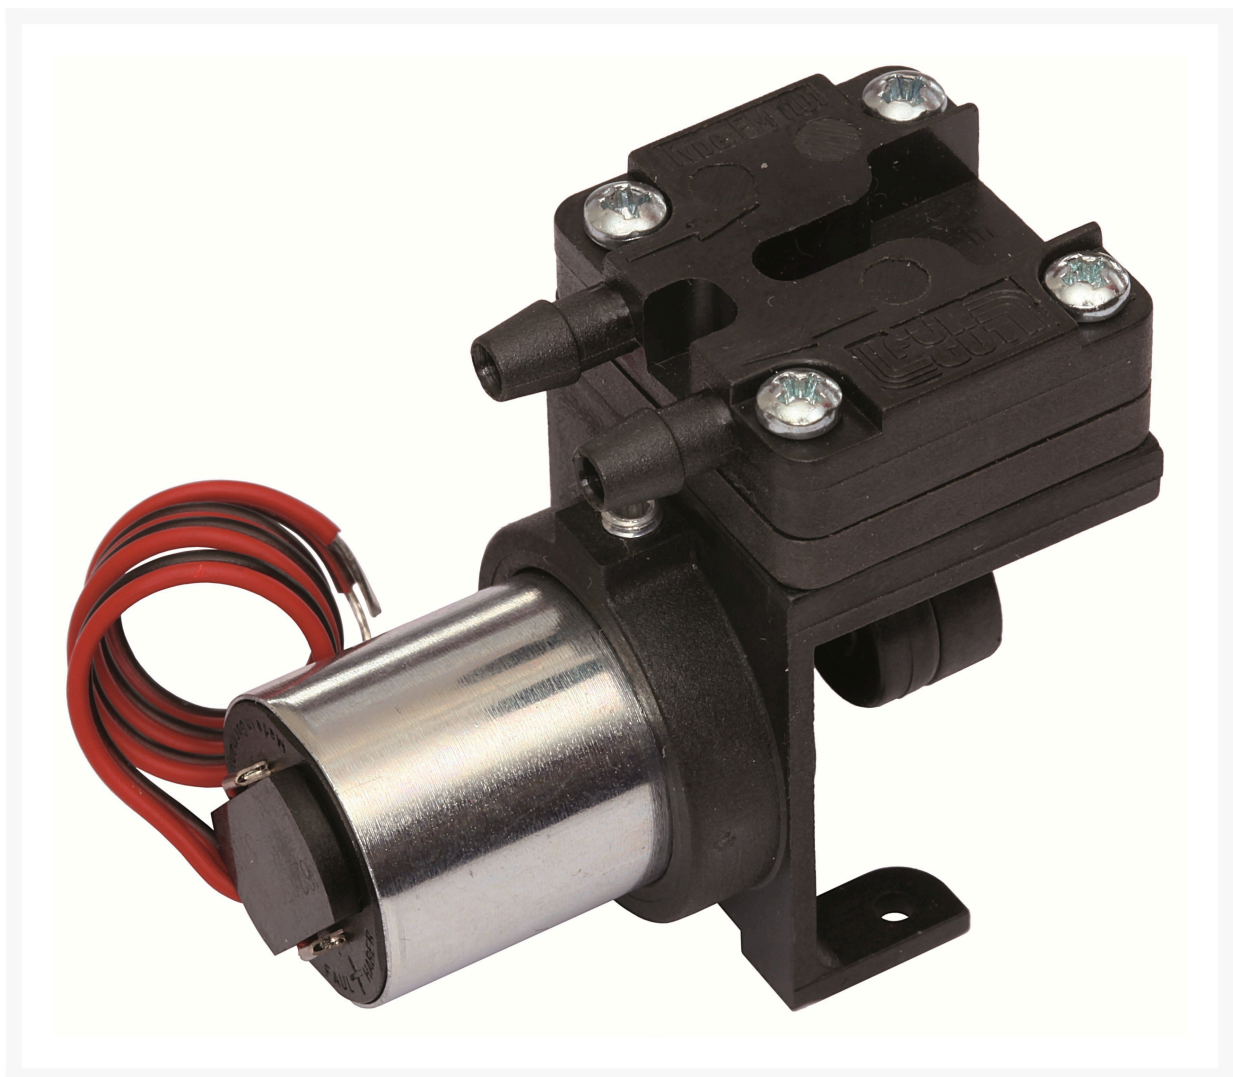

Description

Smallest, low-cost air and liquid pumps, operate completely oil-free without contamination of air, gas or liquid.

Diaphragm and valves are made of EPDM, pump head of Ryton.

Driven by powerful DC motors, without strands.

The pump head with the 2 hose olives (3 mm) can be mounted in 4 positions, each rotatable by 90 degrees.

- oil-free gases, either pressure or vacuum is generated
- Liquids self-priming
- high performance, low weight

The indicated flow rates are dependent on back pressure and refer to air at 20°C. For liquids, the flow rate is about 40% of this.

Operation in the partial power range increases the service life of the motors.

Additional Information

No.	1-1521
Manufacturer (Brand)	neoLab
EAN	4058072188948
Wide	22 mm
Height	36.5 mm
Length	42.2 mm
Depth	42.2 mm
Weight	37 g
Volume	76 dB
Voltage	6 V
Pumps and suction systems Features	with special chemical resistance
Application pump	Evacuation/Suction Compaction
Pressure MIN	330.0000 mbar abs.
Functionality	electric
MAX flow rate [l/min]	1.27 l/min
Number of pump heads	1
Power	2 W
Material membrane	Ethylene propylene diene rubber (EPDM)
Type Connection Output	Hose olive
Type Connection Input	Hose olive
for DM hose inside 1	3.00 mm
Pressure MAX	555.00 bar abs.
Material pump head (wetted)	Polyphenylene sulfide (PPS. Ryton)
Material valves (wetted)	Ethylene propylene diene rubber (EPDM)
Type pump	Mini vacuum pump
Type vacuum diaphragm pump	Vacuum diaphragm pumps for gases. oil-free
Type vacuum pump	Vacuum diaphragm pump

